



SANKI
AUSTRALIA

SK 52 Series

Gear pumps & Dispensers


- Customer Friendly Operation
- Precise Metrology Equipment
- High Performance Hydraulic & Electronic Components
- High Quality Explosion Proof Motor(s)
- Specially designed reusable (cleanable) fuel filtering cartridges
- Available as a dispenser or pump
- Suitable for both diesel and motor spirit
- Works well in harsh Australian conditions
- NMI & ANZEX Approved
- Preset Option
- Hose length modifiable for 110LPM (Highmast length)
- Multiple Flow rate options - including within dispenser
(Note: Maximum permitted flow rate for motor spirit is 50LPM)



Technical Specifications

Accuracy	± 0.25%
Flow Rate	45-110L/min
Ambient Temperature	-25°C ≈ +55°C
Relative Humidity	0% - 95%
Unit Noise Rate	< 70dB
Inlet Vacuum Rate (Suction Pump)	≥ 54kPa
Communication Protocols Supported	Sanki RS485, NZPP (PEC/Compac), Gilbarco*
Power Supply	AC 220V, AC380V (-15% ≈ +10%)
Sale Digits	7 (0.00 – 99999.99) Decimal Adjustable
Volume Digits	6 (0.00 – 9999.99) Decimal Adjustable
Unit Price Digits	5 (0.00 – 999.99) Decimal Adjustable
NMI Approval Number	
ANZEX Approval Number	

*Contact us to confirm controller compatibility

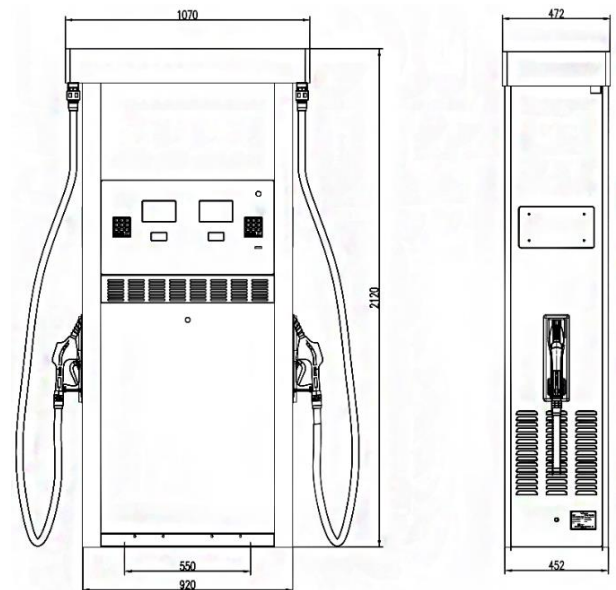

Models



Model	Type	Flow Rate Options	Nozzles	Products	Flow Meters	Displays	Package Size (mm)	Gross Weight	Unit Size
SK52GF111B	Pump	50/80	1	1	1	2	1080 x 490 x 2188	245kg	920 x 450 x 2120
SK52QF111B	Dispenser	50/80/110	1	1	1/1/2	2	1080 x 490 x 2188	210kg	920 x 450 x 2120
SK52GF222B	Pump	50/80	2	2	2	4	1080 x 490 x 2188	308kg	920 x 450 x 2120
SK52QF222B	Dispenser	50/80/110	2	2	2/2/4	4	1080 x 490 x 2188	230kg	920 x 450 x 2120





www.sanki-aus.com.au
1300 783 708

Sanki Australia
Ph: 0499 118 626
info@sanki-aus.com.au



50/80LPM Pump Footprint

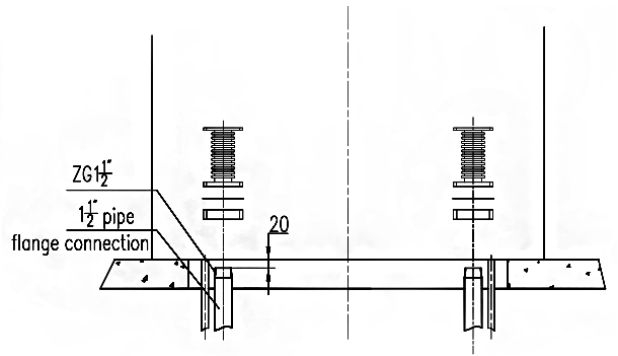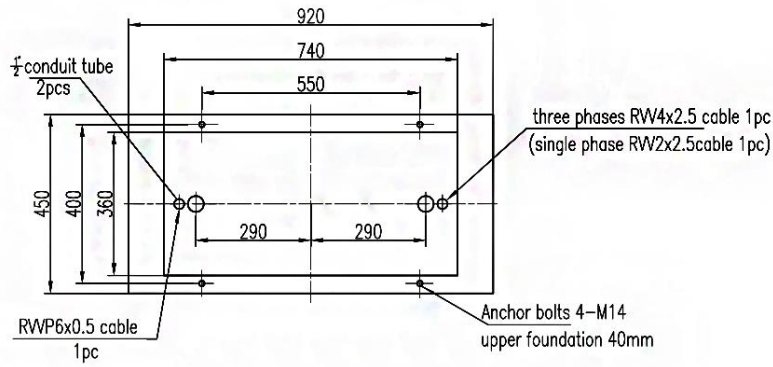


50/80LPM Dispenser Footprint

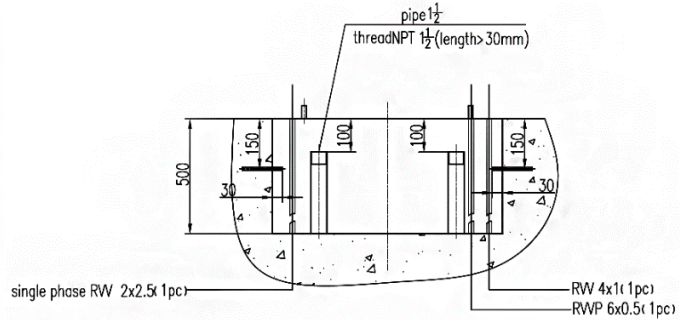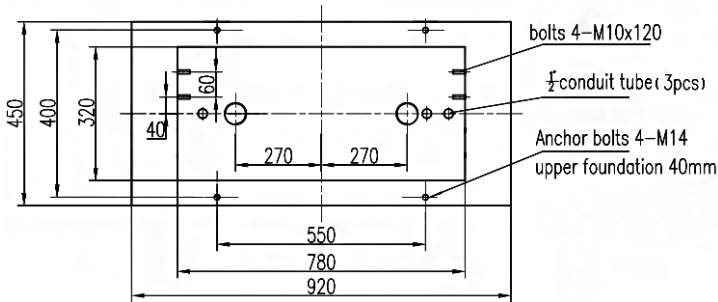

110LPM Dispenser Footprint

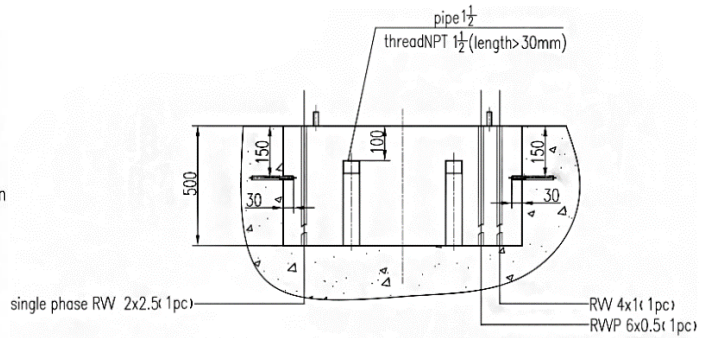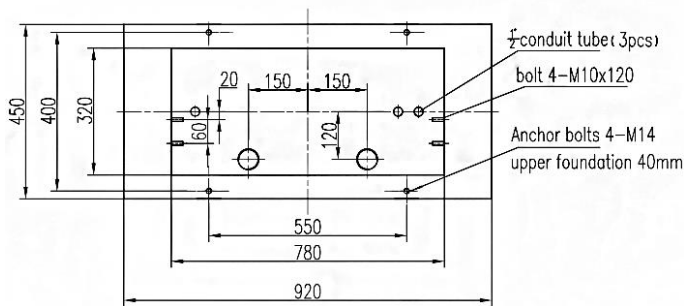

50/80LPM Layout

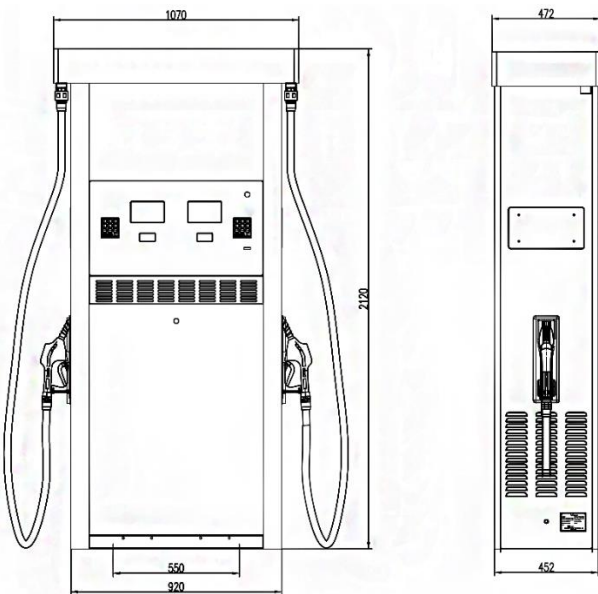

110LPM Layout

